

# HC 228 Duct Tape

## PRODUCT DATA SHEET




### CONSTRUCTION

Substrate: PE/Cloth  
Adhesive: Rubber

### FEATURES

- 8-mil All Purpose Grade Duct Tape
- High tack adhesive
- Bonds well to a large variety of smooth and rough surfaces
- Silver
- Eligible for LEED® compliance credits

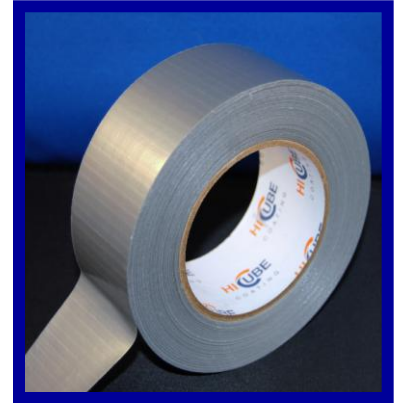

### TYPICAL PROPERTIES

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness	0.008-in	0.203-mm	PSTC-133
Peel Adhesion to Stainless Steel	55-oz/in	6-N/cm	PSTC-101
Tensile Strength	22-lbs/in	38.5-N/cm	PSTC-131

### APPLICATION

Application surface must be clean, dry and free of contaminants.

### SHELF LIFE & STORAGE

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

### STANDARD CONFIGURATIONS & PACKAGING (CUSTOM CONFIGURATIONS & PACKAGING AVAILABLE UPON REQUEST)

Roll Width	Roll Length	Rolls/Carton	Cartons/Pallet
48-mm	180-ft	24	27
72-mm	180-ft	16	27

### LEED®

US Green Building Council – LEED® Green Building Rating System for New Construction and Major Renovations, v 2.2 Indoor Environmental Quality. Contributes towards EQ Credit 4.1 (Low Emitting Materials, Adhesives and Sealants). 1-Point.

For more information on LEED® and LEED® submittals please visit [www.usgbc.org/leed](http://www.usgbc.org/leed). Individual products are not LEED® certified; LEED® requirements consider material performance in aggregate. Please contact application support for assistance.

*Physical and performance values and characteristics shown above are obtained through recommended test procedures. The above values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use. Revision 8.12.2011 16:21.*