

HC 209 Duct Tape

PRODUCT DATA SHEET



CONSTRUCTION


Substrate: PE/Cloth
Adhesive: Rubber

FEATURES

- 7-mil Economy Grade Duct Tape
- High tack adhesive
- Bonds well to a variety of smooth and rough surfaces
- Performs as well as older style 8-9 mil duct tapes
- Eligible for LEED® compliance credits

TYPICAL USES

- Temporary holding
- Bundling
- Sealing various containers and surfaces
- Temporary repairs and patching
- Asbestos abatement

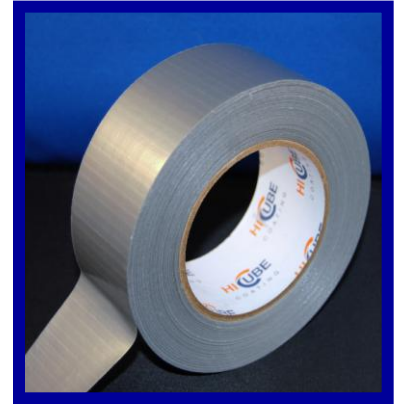

TYPICAL PROPERTIES

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness	0.007-in	0.178-mm	PSTC-133
Peel Adhesion to Stainless Steel	45-oz/in	4.9-N/cm	PSTC-101
Tensile Strength	20-lbs/in	35-N/cm	PSTC-131

APPLICATION

Application surface must be clean, dry and free of contaminants.

SHELF LIFE & STORAGE

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

STANDARD CONFIGURATIONS & PACKAGING (CUSTOM CONFIGURATIONS & PACKAGING AVAILABLE UPON REQUEST)

Roll Width	Roll Length	Rolls/Carton	Cartons/Pallet
2-in	180-ft	24	27
3-in	180-ft	16	27

LEED®

US Green Building Council – LEED® Green Building Rating System for New Construction and Major Renovations, v 2.2 Indoor Environmental Quality. Contributes towards EQ Credit 4.1 (Low Emitting Materials, Adhesives and Sealants). 1-Point.

For more information on LEED® and LEED® submittals please visit www.usgbc.org/leed. Individual products are not LEED® certified; LEED® requirements consider material performance in aggregate. Please contact application support for assistance.

Physical and performance values and characteristics shown above are obtained through recommended test procedures. The above values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use. Revision 11.20.2009 12:23.